






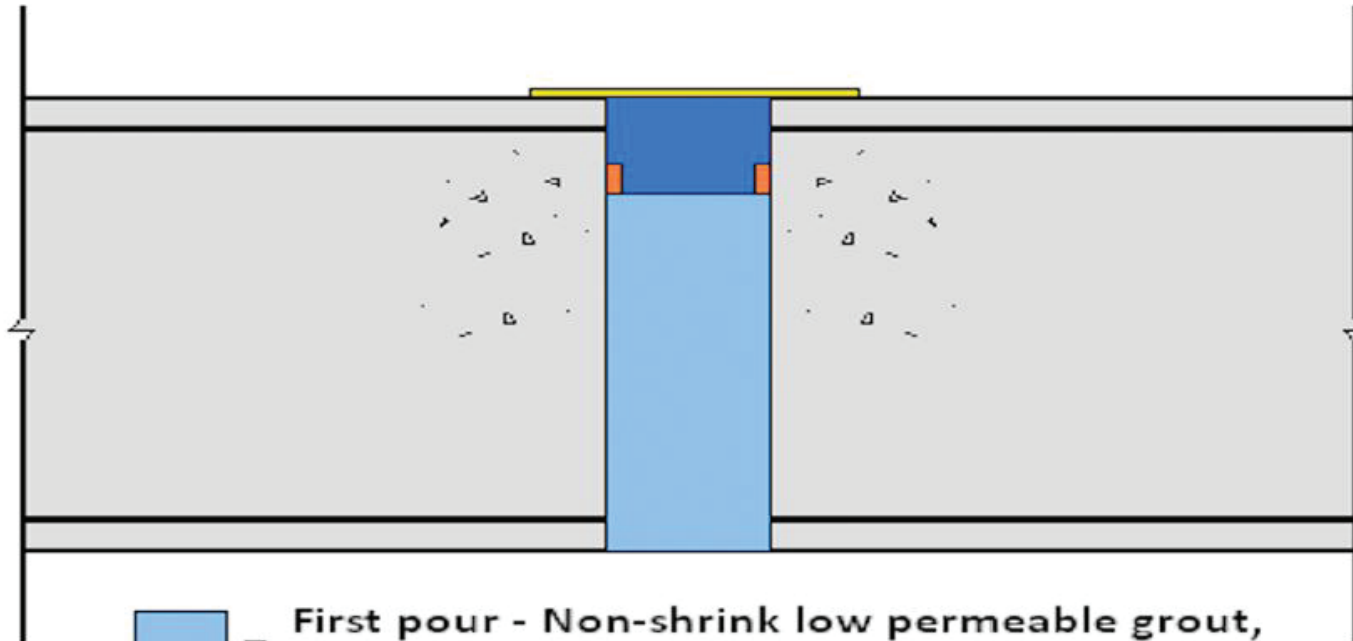

PROACTIVE SOLUTIONS

# DE-WATERING POINT



-  – First pour - Non-shrink low permeable grout, minimum 30MPa@3 hours, final >60MPa.
-  – Hyperseal BR wrapped to perimeter
-  – Second pour - Non-shrink low permeable grout, minimum 30MPa@3 hours, final >60MPa.
-  – Krystol T1 applied to finished surface

Not To Scale

Please Note: All Information Expressed In This Document Is General & Should Be Consulted By KRYFIX On A Project By Project Basis To Ensure The Advice Is Correct

